

# SDA10-4875

Lithium-ion battery system for telecom



SHUANGDENG GROUP

shoto

## Application Scenarios

- Backup Power Supply For FTTB、 FTTH、 ONU、 EPON
- applicable to stable grid, half-grid and other scenes


## Key advantages

- High energy density: more energy with less weight and footprint
- High charge and discharge currents (short charge period)
- Long battery life (up to 3 times the battery life of a conventional battery)
- High efficiency between charging and discharging
- Higher continual power available
- Wide operating temperature
- Predictable end of life due BMS controller
- Multiple anti-theft solutions (optional): software, gyroscope, material, etc.
- Other functions (optional): Heating/LCD/Dry Contact

## Product Certificates

- ISO9001
- ISO14001
- CE
- TLC

## Overall dimensions

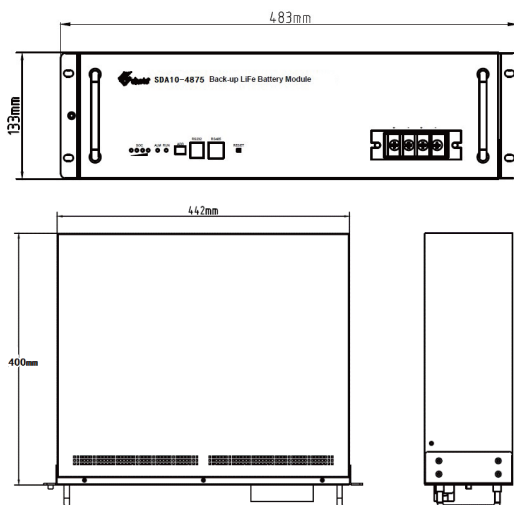

## Technical Parameters

project		index	
1. Performance parameters			
Model	15S	16S	
Nominal voltage	48V	51.2V	
Rated capacity	75Ah(C <sub>3</sub> , 0.2C to 40V at 25 °C )		
Operating voltage range	40V-56.4V	42V-57.6V	
Boost charge/Float charge voltage	54.5V/52.5V	57.6V/54V	
Charging current (current-limiting )	10A	10A	
Charging current (Maximum)	75A	75A	
Discharge current (Maximum)	75A	75A	
Discharge cut-off voltage	40V	40V	
Dimensions	Width	442±1 mm	442±1 mm
	Height	133±1 mm	133±1 mm
	Depth	400±1 mm	400±1 mm
Weight	About 35.5±1 kg	About 37.3±1 kg	
2. Function Description			
Installation method	Rack mounted / Wall mounted		
Communication interface	RS232/RS485		
Indicator state	ALM/RUN/SOC		
Parallel communication	Maximum support for 16 sets of parallel		
Terminal stud	M6		
Alarm and protection	Over voltage, under voltage, short circuit, overload, over current, over temperature, low temperature protection, etc.		
3. Working Condition			
Cooling mode	Self-cooling		
Altitude	≤4000m		
Humidity	5%-95%		
Operating temperature	Charge	-5°C~+45°C	
	Discharge	-20°C~+50°C	
Recommended operating temperature	Charge	+15°C~+35°C	
	Discharge	+15°C~+35°C	
	Storage	+10°C~+35°C	

Passion for Storage  
and Green Energy

# SDA10-4875

lithium-ion battery  
system for telecom



## SDA10- 4875 series Constant Current Discharge Characteristics (25°C,77°F)


Voltage	Current/A		Time/h									
	0.1C	0.2C	0.3C	0.4C	0.5C	0.6C	0.7C	0.8C	0.9C	1C		
46.5V	9.55	4.7	3.04	2.2	1.67	1.33	1.06	0.87	0.69	0.54		
45.0V	9.89	4.87	3.19	2.34	1.82	1.49	1.24	1.03	0.87	0.72		
43.5V	10.12	4.97	3.27	2.42	1.9	1.55	1.3	1.13	0.99	0.87		
42.0V	10.3	5.1	3.34	2.47	1.95	1.62	1.36	1.18	1.03	0.92		
40.0V	10.5	5.2	3.41	2.54	2	1.65	1.4	1.22	1.07	0.95		

## SDA10-4875 Constant Power Discharge Characteristics (25°C,77°F)

Voltage	Power/W		Time/h									
	360	720	1080	1440	1800	2160	2520	2880	3240	3600		
46.5V	9.54	4.69	3.02	2.18	1.65	1.32	1.05	0.86	0.68	0.53		
45.0V	9.88	4.85	3.17	2.32	1.8	1.47	1.22	1.01	0.85	0.7		
43.5V	10.1	4.95	3.24	2.41	1.89	1.53	1.28	1.11	0.98	0.86		
42.0V	10.28	5.1	3.33	2.43	1.92	1.58	1.31	1.15	1.01	0.9		
40.0V	10.35	5.15	3.37	2.44	1.95	1.6	1.35	1.18	1.04	0.92		

## Discharge Curves

SDA10-4875 Discharge time at different load power

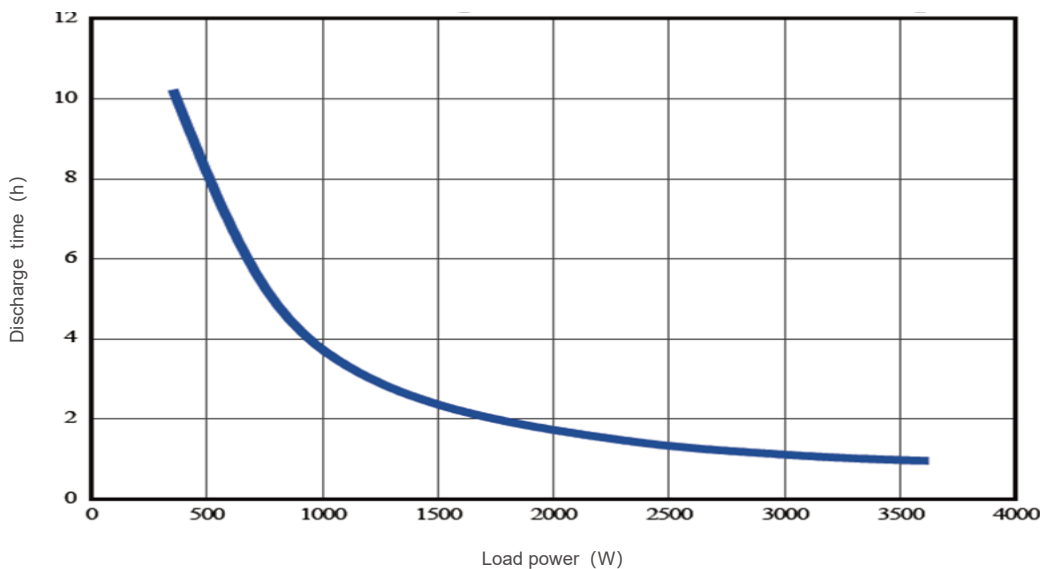

Declaration: This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact CHINASHOTO for the latest information.

Welcome to Visit: [www.chinashoto.com](http://www.chinashoto.com)